For Residential Applications

Job Name	Contractor
Job Location	Approval
Engineer	Contractor's P.O. No.
Approval	Representative

Series 100DT

Drain Tubes

Size: 3/4" (20mm)

Series 100DT Drain Tubes are used to easily provide a safe discharge line from residential water heater temperature and pressure relief valves. No special tools, fittings or sealants are required to install these drain tubes, they are simply hand-tightened to the T&P valve discharge.

Series 100DT Drain Tubes can be used on gas, electric or oil fired water heaters to safely drain water discharged from the heater's temperature & pressure relief valve.

Features


- Models available for both side and top mounted T&P relief valves
- · No special tools required to install, simply hand-tightened
- · Can be used on gas, electric or oil fired water heaters
- · UPC and IAPMO listed, ASME A112.4.1 approved
- Meets Department of Housing and Urban Development requirements


Pressure – Temperature

Maximum Operating Temperature: 250°F (121°C) Maximum Working Pressure: 15psi (103.35 kPa)

Dimensions — Weights

MODEL	CONNI	ECTION	DROP LENGTH		RUN		WEIGHTS	
	SIZE		А		В			
	in.	mm	in.	mm	in.	mm	lbs.	kgs.
100DT	3/4"	20	48"	1200	_	_	0.19	0.08
100DT-72	3/4"	20	72"	1800	_	_	0.20	0.09
100DT-A60	3/4"	20	60"	1524	8"	200	2.00	0.91
100DT-A60-12	3/4"	20	60"	1524	12"	300	2.00	0.91

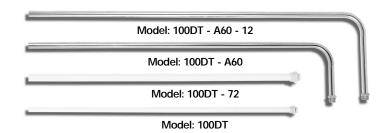

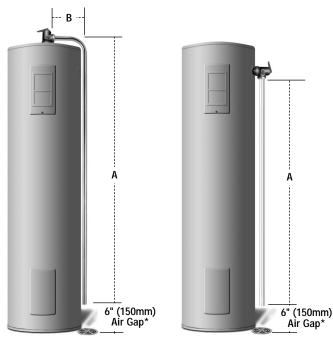

Top Mount T&P Valve

Side Mount T&P Valve

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

REGULATOR ISO 9001

USA: 815 Chestnut St., No. Andover, MA 01845-6098; www.wattsreg.com **Canada:** 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca

^{*} Drain tube must be trimmed to 6" (150mm) above drain so that any relief discharge will be visible.